


# /Group 2.5 Ordering Code Rules

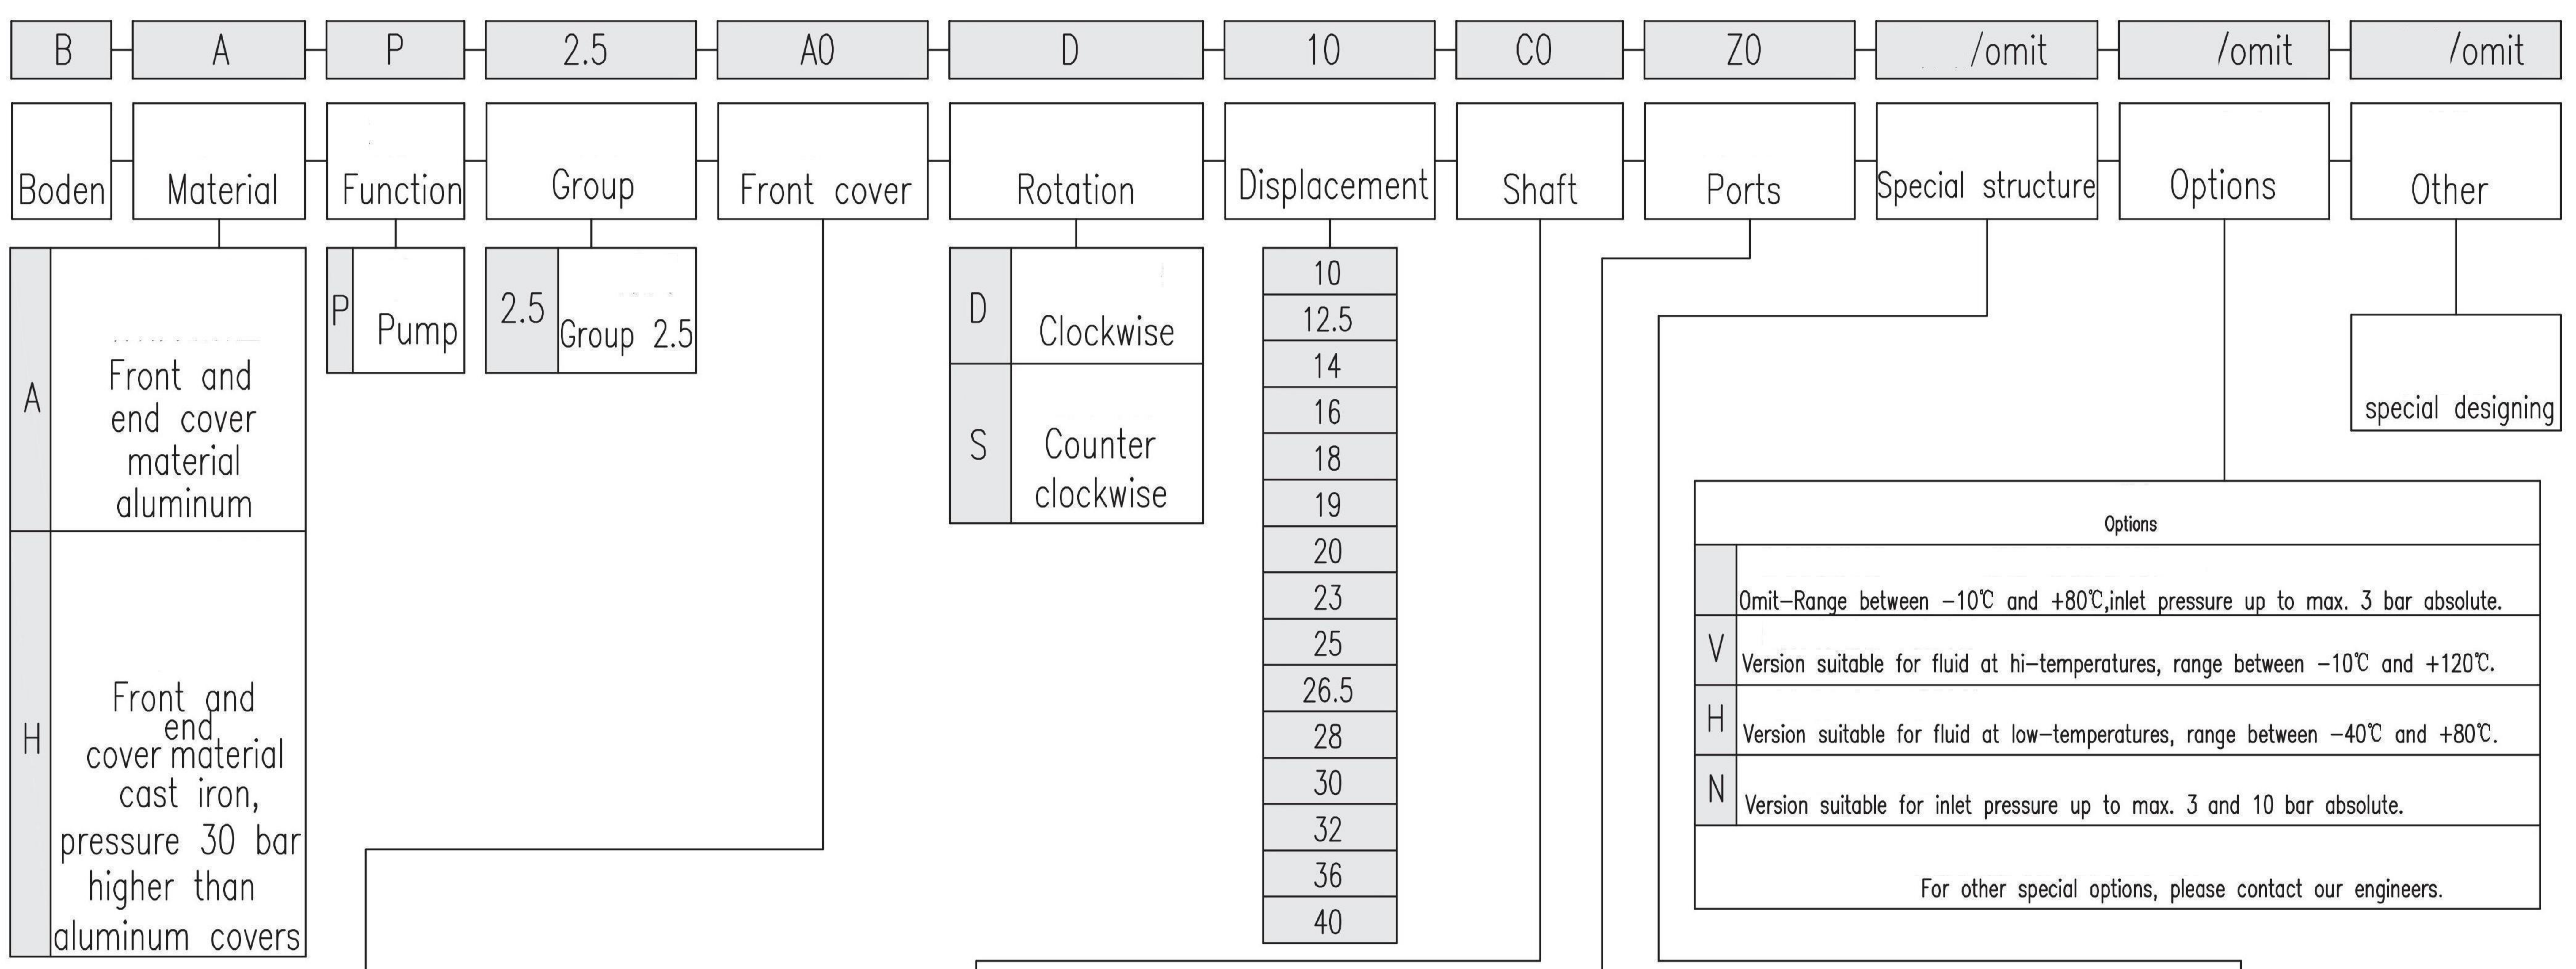

Front cover		Shaft		Ports		Special structure			
A0	<p>Diamond front cover (centering φ85mm)</p>	C0	straight keyed φ20		E	Rectangular flange		omit-regular	
		C1	straight keyed φ18		F	Rectangular flange			
A1	<p>Diamond front cover (centering φ82.55mm)</p>	C2	straight keyed φ19.05		F	Split flange			
		H0	Rectangle spline shaft └┘ 6-20x16x4		Z	Metric thread			
		H1	Rectangle spline shaft └┘ 4-18x15x5		L	Gas thread			
		S0	Involute spline shaft EXT12Z-1.5m-30°		U	UNF thread			
		S1	SAE spline shaft DP16/32-30°-10T		R	PT thread			
		S2	SAE spline shaft DP16/32-30°-11T		X	Body without ports			
		S3	SAE spline shaft DP16/32-30°-13T						
See page 136 for details		See page 136 for details		See page 137-138 for details					