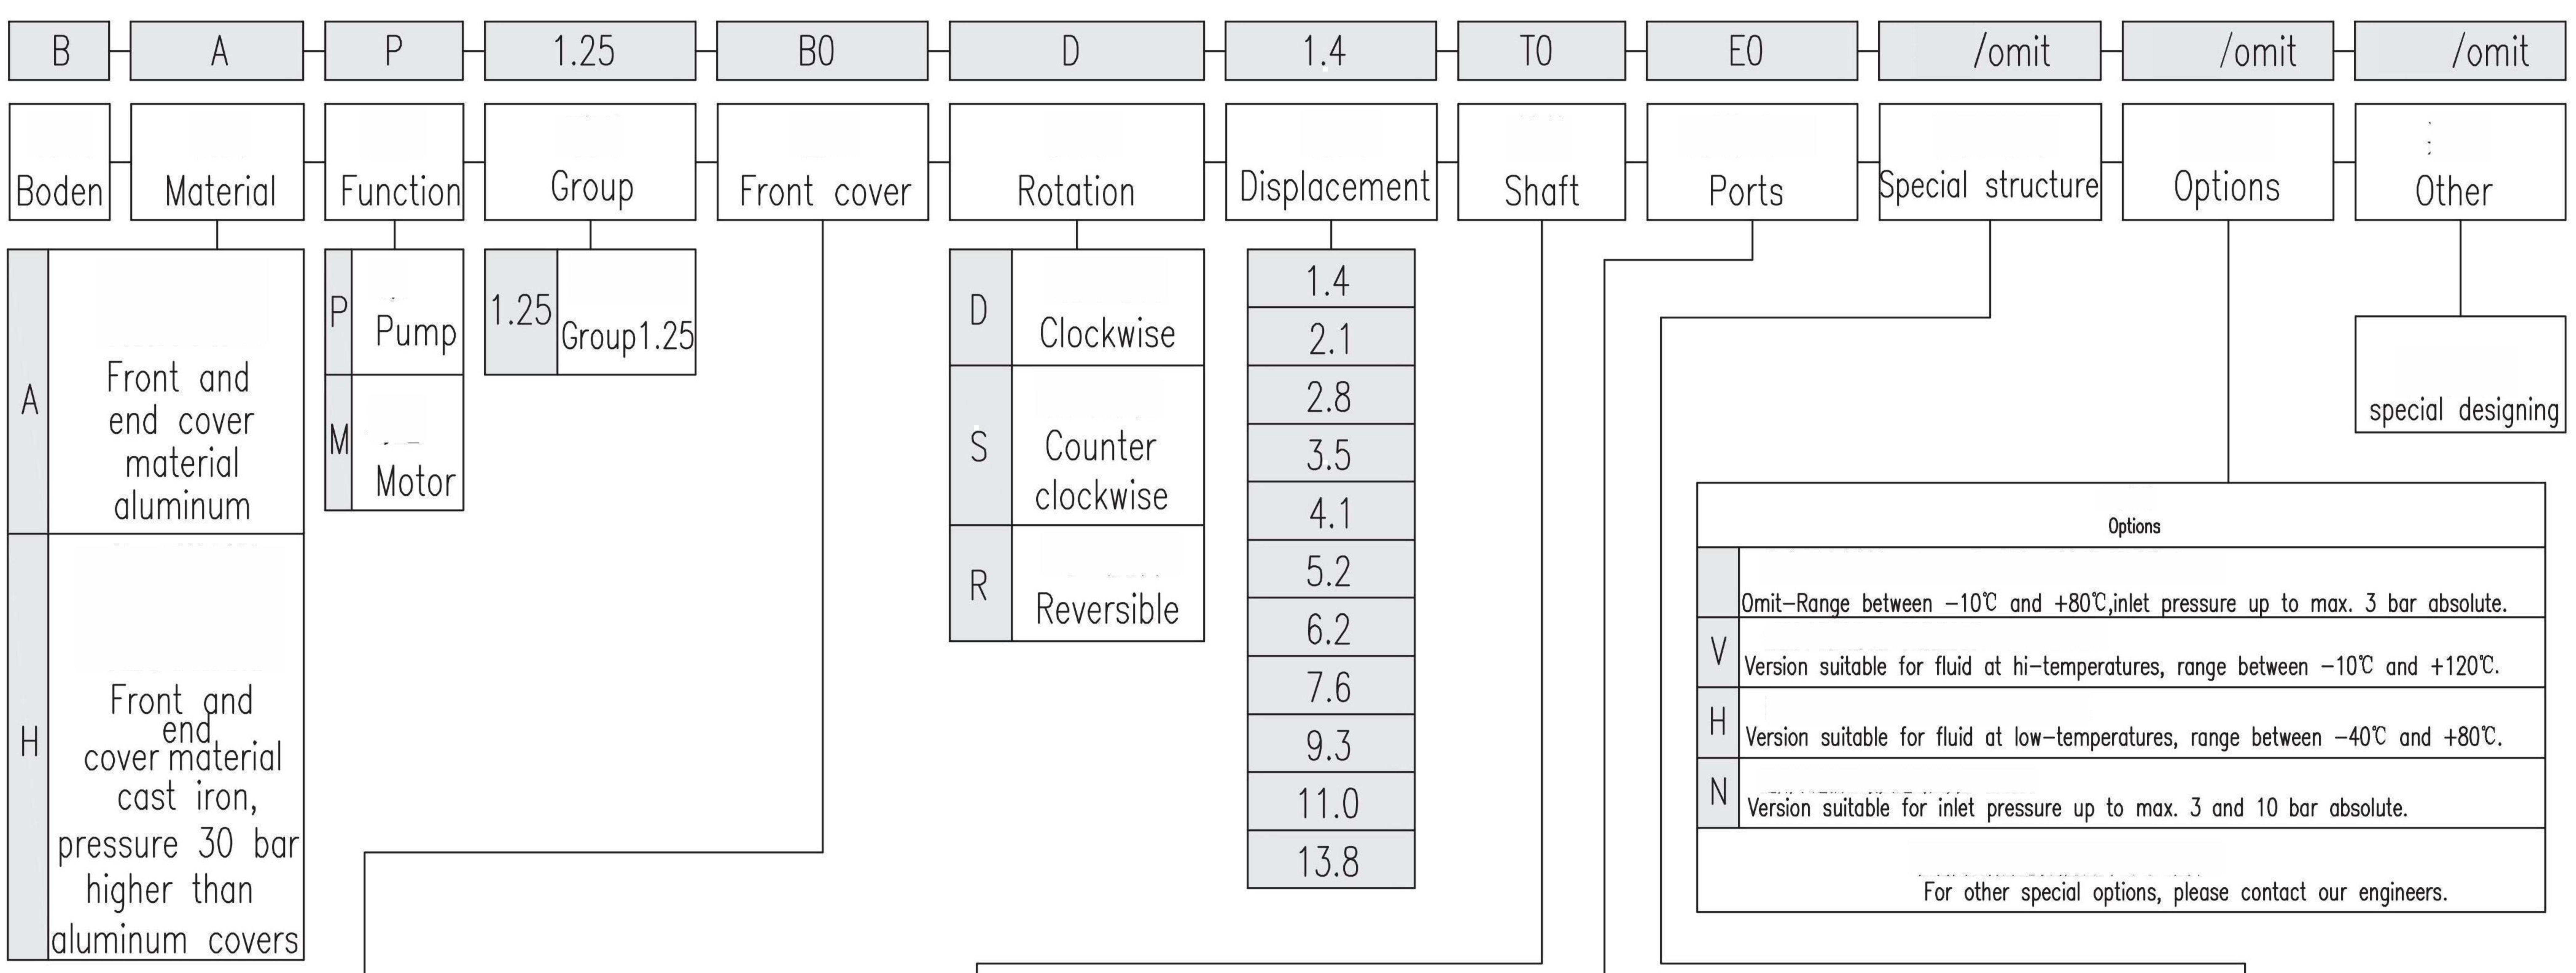
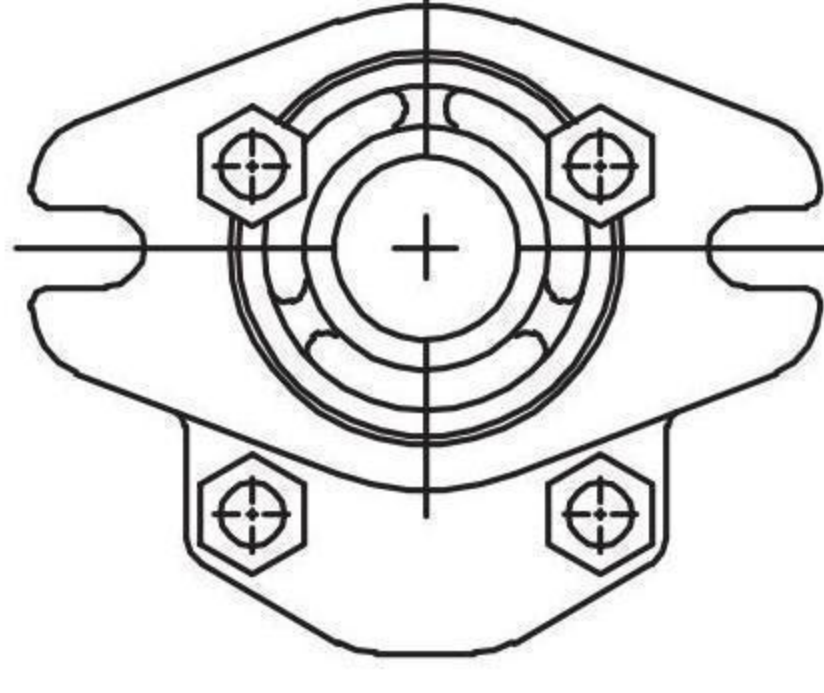
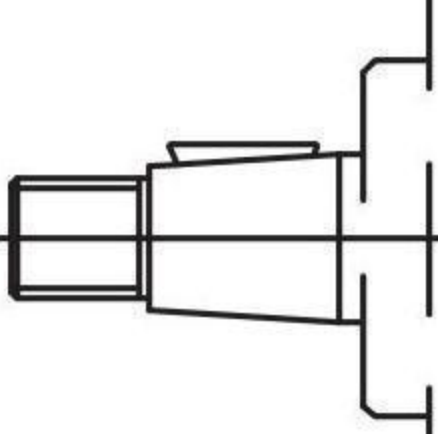
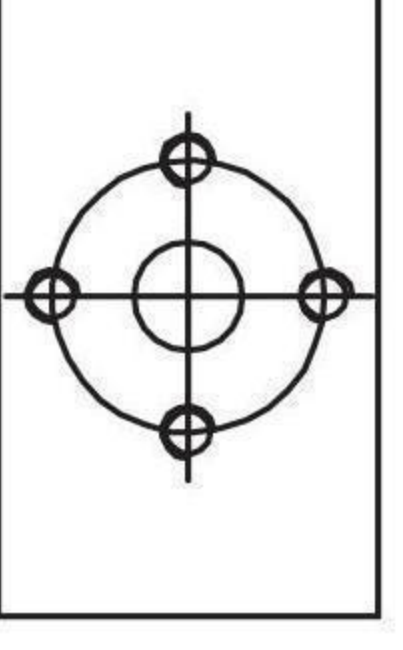
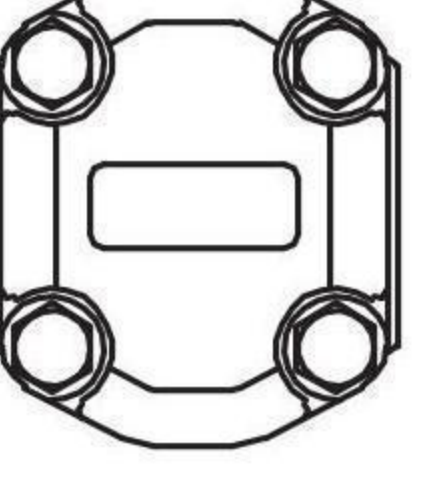
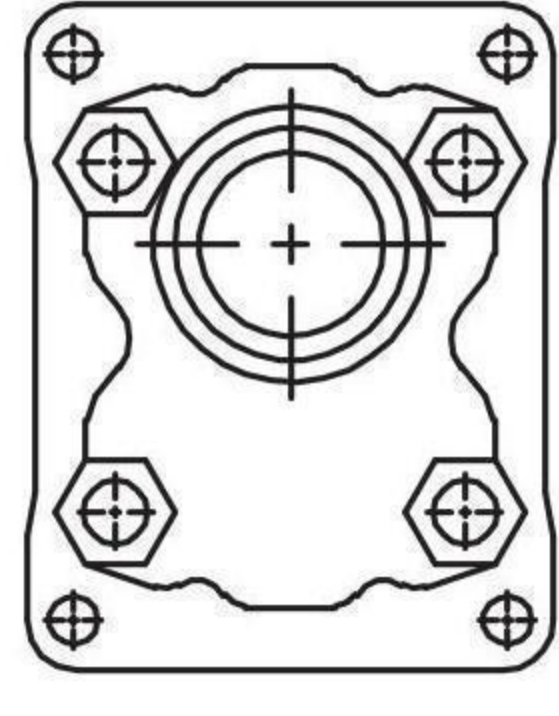
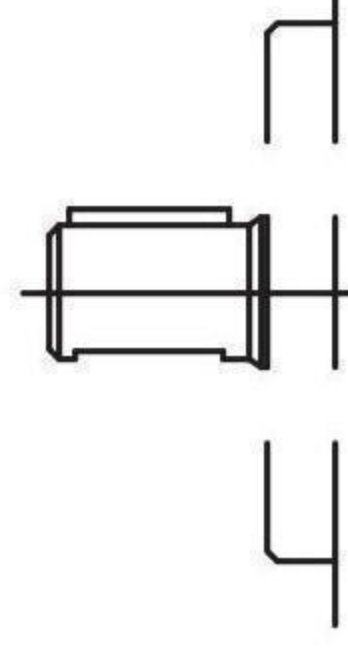
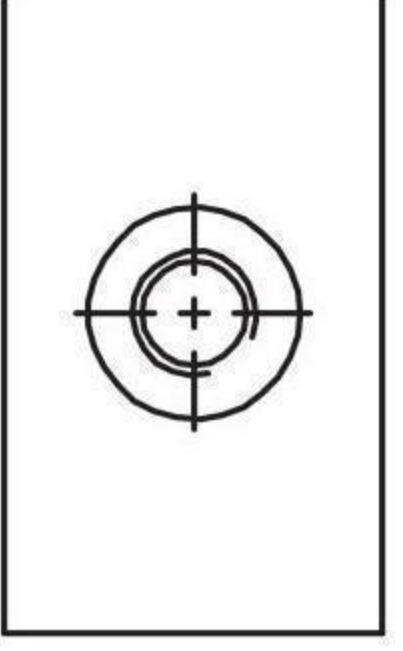
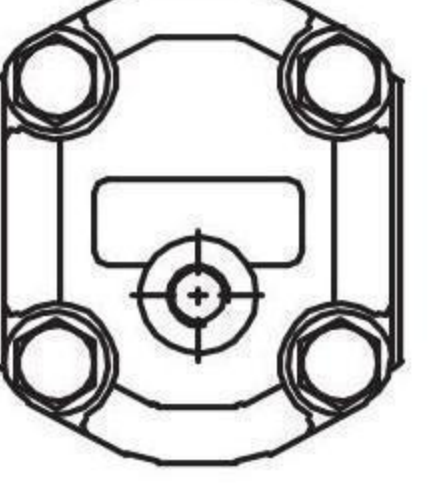
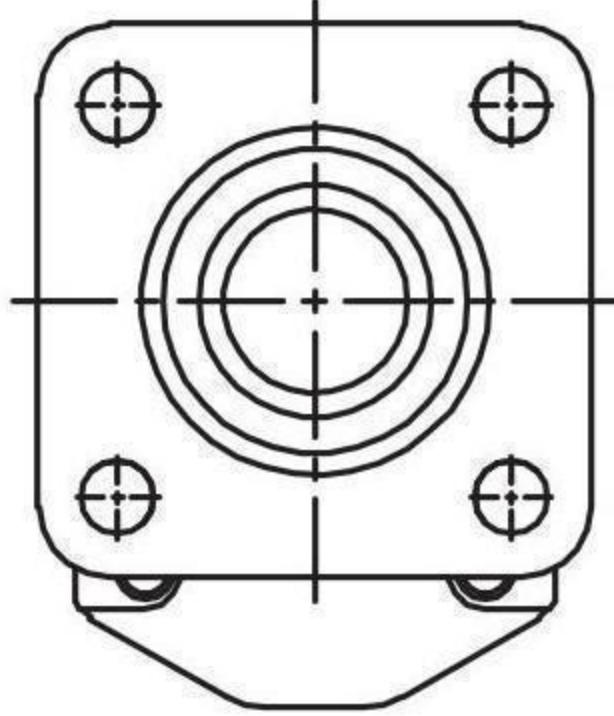
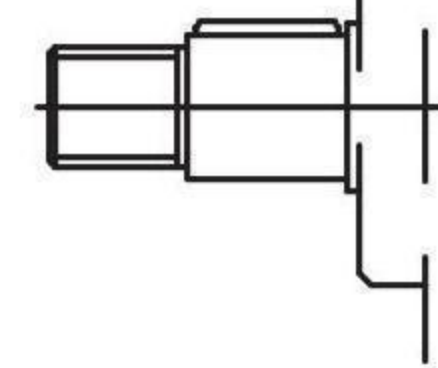
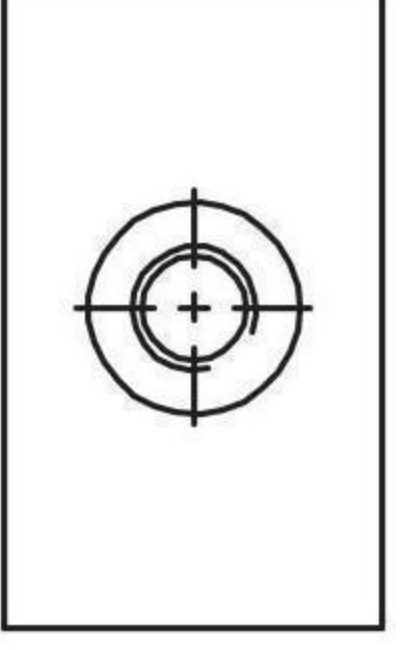

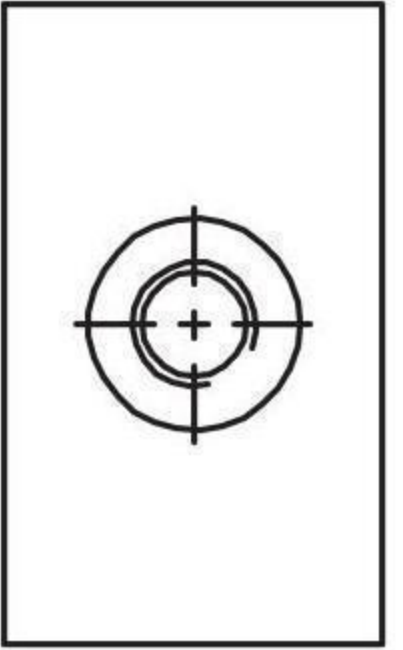
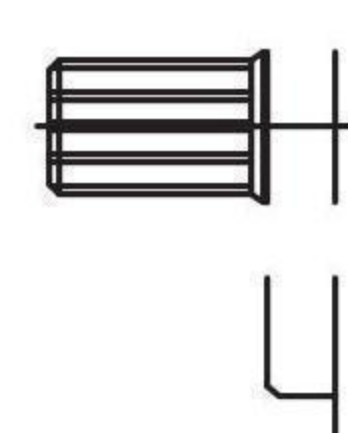

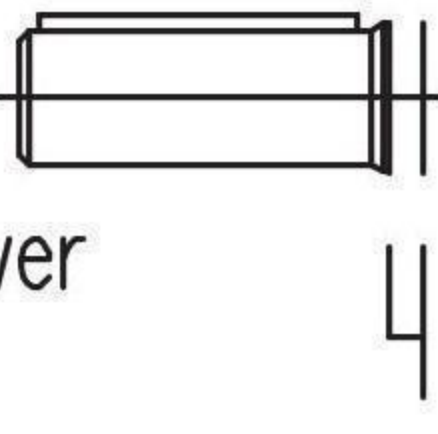
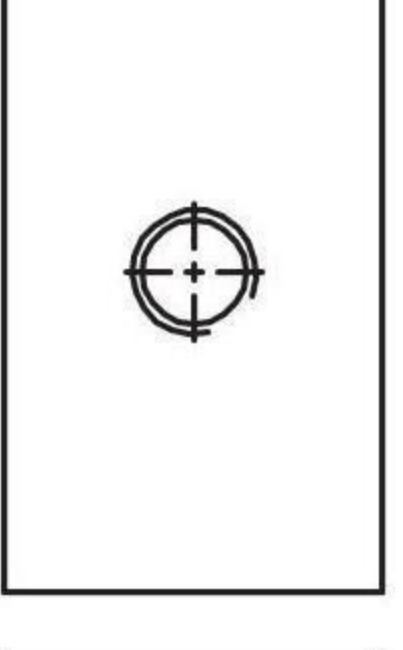
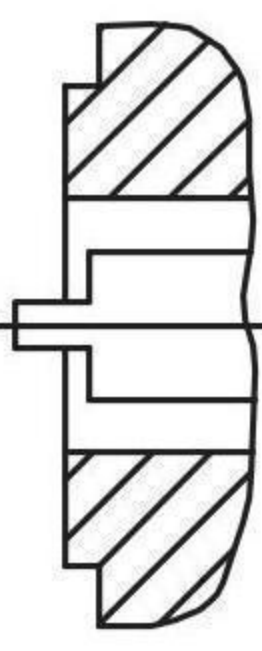
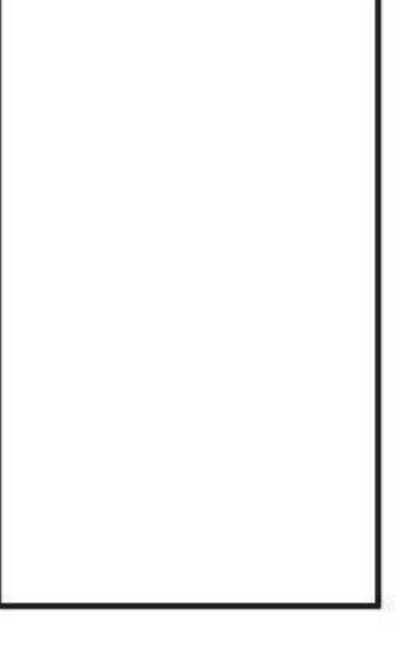
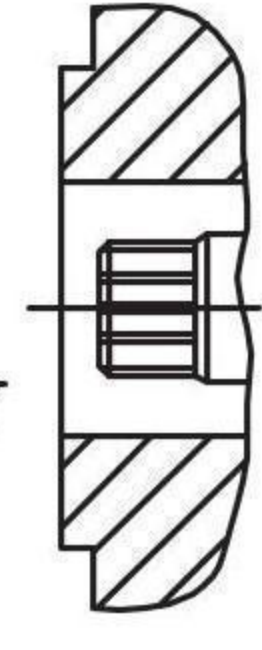


/Group 1.25 Ordering Code Rules



Front cover		Shaft		Ports		Special structure	
A0	Diamond front cover (centering $\phi 50.8\text{mm}$ ) 	T0	Taper shaft 1:8 	E	Rectangular flange 		omit—regular 
B0	Square front cover (centering $\phi 30\text{mm}$ ) 	C0	Straight keyed 	Z	Metric thread 	Q	Back cover with oil drain 
Q0	Square front cover (centering $\phi 45.24\text{mm}$ ) 	C1	Semi-circular key shaft 	L	Gas thread 		
		G0	Tang shaft 	U	UNF thread 		
		S0	SAE spline shaft DP20/40-30°-9T 	R	PT thread 		
		C0	Straight keyed With Q0 front cover 	N	NPT thread 		
		G1	Tang shaft With Q0 front cover 	X	Body without ports 		
		S1	SAE spline shaft With Q0 front cover DP20/40-30°-9T 				
See page 65 for details		See page 65 for details		See page 66-67 for details		See page 67 for details	